

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
1 April 2004 (01.04.2004)

PCT

(10) International Publication Number  
WO 2004/026497 A1

(51) International Patent Classification<sup>7</sup>: B21B 1/46,  
B22D 11/06, B21B 1/26, 37/00, 37/34

(21) International Application Number:  
PCT/IT2003/000523

(22) International Filing Date: 28 August 2003 (28.08.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
MI2002A 001996  
19 September 2002 (19.09.2002) IT

(71) Applicant and

(72) Inventor: ARVEDI, Giovanni [IT/IT]; Via Mercatello,  
26, I-26100 Cremona CR (IT).

(74) Agents: ADORNO, Silvano et al.; Società Italiana  
Brevetti S.p.A., Via Carducci, 8, I-20123 Milano (IT).



(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,  
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,  
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,  
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,  
MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC,  
SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA,  
UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),  
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,  
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,  
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,  
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:  
— with international search report

[Continued on next page]

(54) Title: PROCESS AND PRODUCTION LINE FOR MANUFACTURING ULTRATHIN HOT ROLLED STRIPS BASED N  
THE THIN SLAB TECHNIQUE

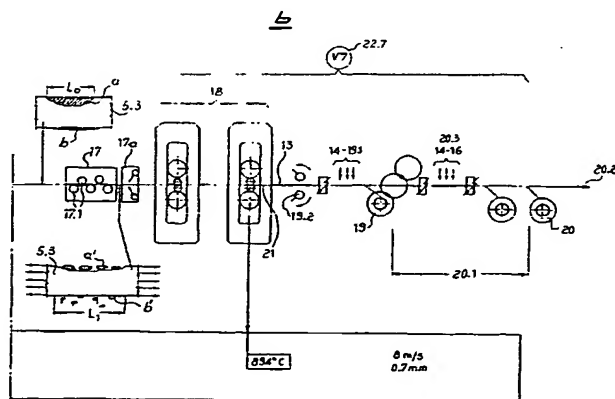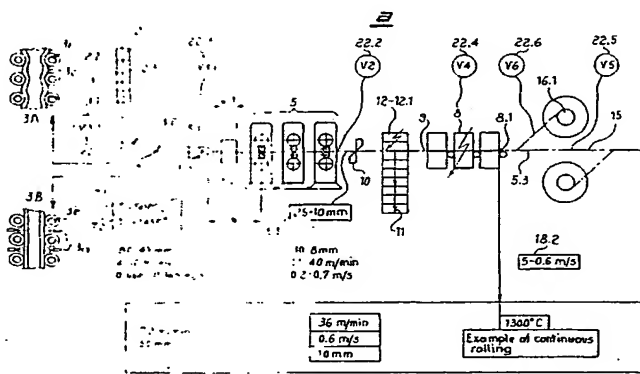

(57) Abstract: Process and production line for continuous manufacturing of ultrathin hot rolled steel strip from thin slab obtained through a process of continuous casting comprising a secondary cooling system, a pre-transformation by roughing (5) of the thin slab immediately after the continuous casting, an induction heating (8) to fix temperatures of the intermediate strip chosen between 1000 and 1400°C, a final rolling (18) up to a thickness of the hot finished strip of 0.4 mm at a minimum through not more than 36 six passes while keeping a controlled temperature of the hot rolled strip from the last stand of the finishing rolling mill higher than 750°C. It is also provided a cooling (14), in the time, of the strip (13) between the last stand of the finishing rolling mill and the coiling in view of the specific T.T.T diagram ( time-temperature-transformation) for steel quality and strip thickness. A control system of the process is also provided with a master system and six further peripheric sub-systems.



*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

PROCESS AND PRODUCTION LINE FOR MANUFACTURING ULTRATHIN HOT ROLLED STRIPS BASED  
N THE THIN SLAB TECHNIQUE

The present invention relates to a process, as well as the corresponding  
5 production line, for manufacturing ultrathin hot strip, being rolled through a  
thermo-mechanical means to thicknesses down to a minimum of 0.4 mm based on  
the thin slab technology.

It is known that the so-called "thin slab" technique for manufacturing hot  
rolled strip has been strongly developing from the time of the first plants of this  
10 type in USA and Italy starting since years 1990 and 1992.

At present with this thin slab technology can already be produced as hot  
strip whichever quality of steel, both in the field of carbon steels and in that of  
stainless steel. The state of the art is described by way of example in DE  
3840812C2, EP 0415987B1, DE 19520832A1 and WO 00/20141. Under a more  
15 attentive examination it appears that a hardly controllable parameter is the  
temperature: at a casting speed of 4-6 m/min and hot strip thickness <2 mm  
temperatures of the intermediate strip <900°C (AC3) are measured at exit from  
the roughing mill and strip temperatures <750°C (AC1) at exit from the finishing  
mill, which cause quality inconveniences as to the properties of the material and  
20 the production safety.

In order to avoid going below these critical temperatures, the thickness of  
the intermediate strip after the roughing or high reduction mill HRM at casting  
speeds of 4-6 m/min cannot be less than 20 mm. This value of the intermediate  
strip thickness leads e.g., after passing through the induction heating zone and  
25 reaching a strip temperature of about 1200°C at the furnace exit, again to limits of  
the hot finished strip thickness, limits that it is impossible to exceed downwards  
without also reaching at the same time temperatures lower than AC1 temperature  
of 750°C, such as in case of a carbon steel with 0.06%C, with consequent  
drawbacks in the steel quality.

30 It is also known after ten years of productive experience and developments  
of the thin slab technique, that the trade demand has to be met with a hot rolled

strip product of better quality and at lower costs. The requirements of the market for a hot rolled strip are directed in particular to a minimum thickness of 0.4 mm and at the same time a thermo-mechanical rolling in the meaning of the T.T.T. diagram, leading to the desired and improved mechanical characteristics of the material. In this context a low-cost production of Dual Phase, TRIP and TWIP steels production has been taken into consideration, in the best technical way by means of the thin slab technique.

Object of the present invention is that of developing a combination of process and production line based on the thin slab technique by means of a hot strip finishing mill, such as to allow the manufacture of ultrathin hot strip, 0.4 mm thick as minimum with a maximum width of 2.2 m in a thermo-mechanical way according to the T.T.T. diagram, having a controlled crystal structure, and consequently controlled properties of the material.

Another object of the invention, in addition to the standard production of hot strip wound in coils with specific weight of about 20 Kg/mm width, is the so-called "continuous rolling" of the above-mentioned high quality hot strip, allowing for any weight of the coil and also a direct connection with the subsequent working steps.

A further object of the invention is to provide also a secondary cooling system in the casting machine during the liquid core reduction.

The above-mentioned objects are achieved in particular by means of the features, non obvious in the art, which are defined in the independent claims 1 and 13.

The present invention will be now described with reference to the annexed drawings, given by way of non-limiting example, in which:

Figures 1a and 1b schematically show, combined together, the preferred example of productive line for the process according to the invention;

Figure 2 schematically shows a preferred embodiment of the system controlling the process;

Figure 3 shows a diagram of strip temperature in function of the strip thickness or the number of rolling passes;

Figure 4 shows a diagram of the variations of the strip temperatures in function of the sequence of rolling passes in the time; and

Figure 5 shows a T.T.T. diagram for a steel analysis in view of the production of a Dual Phase, TRIP or TWIP steel.

5        With reference to figs. 1a and 1b, a preferred productive line according to the invention, capable of carrying out the inventive process, is represented in its components. There is present, at the beginning of the line, a continuous casting system 1 with oscillating mould 2 that feeds at its outlet, with a maximum casting speed of 10 m/min, a slab with a width of 800-1200 mm and a thickness of 100-70  
10    mm. Downstream of the mould a roller path (or table) 3 is provided, mechanically arranged to reduce by 60% at maximum the slab thickness in the zone 3.1 during the solidification and up to 80-40 mm in the zone 3.2 with a casting speed that should constantly be kept at its maximum values to obtain the best productivity and the highest slab temperature at the exit from the casting machine.

15        It has been found that the mould will preferably have a geometry such that on leaving it the slab shows a not perfectly rectangular section, but with a central crown of a value preferably between 0.5 and 5 mm at each side 2.2. The subsequent pre-strip, after solid core rolling, will preferably still have a central crown of up to 0.4 mm at each side 5.3.

20        A specific hardware device with relative software may be provided in order to obtain the geometrical tolerances required by this strip, so as to contain the thickness variations of the slab leaving the continuous caster within the range of values of  $\pm 1$  mm, irrespective of roll gaps and wear. For this purpose an active position actuator/regulator and parallelism control combined with the first part of  
25    the casting machine may be provided.

      This means that the end of solidification, in zone 3.3 is to be found at the end of the continuous casting machine.

      A reduction of the above-mentioned slab thickness during the solidification is considered as the most important technical advantage of the process and the  
30    relevant quantity is referred to as parameter V1, being also indicated as datum 22.1 of the control system, with reference to figure 2. It is in fact a consequence of

said values of thickness reduction the achievement of a fine crystal structure and a reduced inner cracks and segregation, thereby resulting in improved characteristics of the material. Furthermore the slab thickness reduction can be chosen so as to optimize the conditions in the whole manufacturing process.

5       An important point to achieve at this stage of the process was to develop a particular type of air/water secondary cooling 3B, specially studied in combination with the liquid core reduction process of the point 3. The aim of this process was to achieve a temperature variation of  $\pm 30^{\circ}\text{C}$  along both the external surfaces in contact with the casting rolls 3b, in order to obtain a temperature  
10       distribution as homogeneous as possible, essential to achieve the internal quality conditions as above-mentioned, thanks above all to a reduction of the bulging effect 3A-3c to a minimum, at high casting speeds (up to 8 m/min) and an exit temperature below  $1200^{\circ}\text{C}$  in order to prevent phenomena of enlargement of the austenitic grain with negative effects on the product quality during rolling.

15       As regards intensity, suitable specific volumes of water must be ensured, quantifiable in 0.6-3 l/kg of product, while the cooling density ( $\text{l/min per m}^2$ ) must be greater in the upper part of the casting machine, where slab temperatures are higher, cooling water vaporization is stronger and the skin still relatively thin, which is why the transmission of heat with the liquid core is facilitated. "Air-  
20       mist"-type nozzles 3a will preferably be used.

Temperature homogeneity on the perimeter of each transversal cross-section may be obtained by suitably choosing the number of nozzles 3a and their spray pattern in the space between each pair of opposite rolls. Selective control of the delivery of the nozzles between the front side and back side of the slab must also  
25       be provided, by increasing the back side delivery in order to compensate for the lack of stagnation phenomena in the concave area between the front side rolls and the slab. For the same purposes it will also be useful to carry out selective dynamic control on some of the nozzles in each area between successive rolls, while observing for example the upper and/or lower slab surface temperature on  
30       the transversal sections, for example by means of an infrared scanner.

For temperature homogeneity in the longitudinal section, dynamic control of

the total delivery and/or the distribution of the cooling density along the casting machine is carried out in order to keep the desired temperatures of the slab surface constant in one or more detection points along the casting machine. It is to be noted that the temperatures in this direction may be affected by numerous parameters such as casting speed, the liquid steel casting temperature, the entity of thermal exchanges in the mould and the chemical composition of the cast steel. The expected slab surface temperatures are calculated with suitable solidification models which consider:

- steel chemical composition;
- 10 - sensitivity of the steel to internal deformation (bulging);
- sensitivity of the steel to thermal gradients (possible internal or surface cracks in the transversal or longitudinal direction);
- geometrical characteristics of the casting machine;
- foreseen casting speeds;
- 15 - foreseen metallurgical lengths.

To this effect the secondary cooling system is provided with various nozzle areas controlled by area valves for water and/or air in the case of air-mist, which in the upper part of the casting machine may include nozzles both on the front side and the back side, while in the lower part they may be differentiated between front side and back side. These valves may control only some of the nozzles present in each of the spaces between the rolls so as to have more than one active control of cooling in the transversal direction.

The slab 2.2 is directly fed, at the exit of the continuous casting apparatus, to a roughing mill (or HRM) 5 in order to be rolled to a thickness of 30-8 mm in not more than four passes. The thickness reduction to be obtained by rolling is so determined to have the best conditions for the process in its whole. Furthermore the relatively slow speed of 4-10 m/min, when entering 5.1, i.e. 0.066-0.166 m/s, causes a rather sensible broadening of the rolled product or "slab" 5.2, and thereby a highly improved profile, symmetrical in a transverse direction with deviations of less than 1%. Such a good profile of the intermediate strip 5.3 is actually a basic condition for having a good profile of the finished product 13, in other words of

the thin hot rolled strip, with a thickness of 1.5-0.4 mm.

The good quality of the intermediate strip 5.3 profile, under condition of the low rolling speed in 5.1 when entering HRM 5 can be cited as the second technical advantage V2 of the process, capable of strongly influencing the flexibility of the whole process and the product quality. The same datum can be indicated as parameter 22.2 in the control system 22 described in the following with reference to fig. 2.

By keeping preferably low the distance 6 between the continuous casting machine 1 and the entry into HRM 5 e.g. comprised between 0.5 and 4 m, the slab 2.2 which is solidified at the end of the roller table 3 is fed forward in the roughing mill with a temperature of 1450° C in its most inner region 7, thereby with a "hot core" as it is usually said, while the temperature at the surface is of 1150°C. Such an inverted gradient of temperature 7.2 of the slab 2.2 on half thickness of the slab itself at the entry of HRM 5 allows for a more homogeneous and uniform transformation throughout the thickness of the material to be rolled 5.2, since also the so-called "core" is transformed more homogeneously. This also appears from the edges of the material to be rolled, which are convex and well defined at the exit from HRM 5.

The product to be rolled or slab 5.2 with its inverted temperature gradient 7.2, also contributes, by directly entering the roughing mill 5, to the fact that the properties of the material, as well as the profile of the intermediate strip 5.3 and of the final hot rolled strip, are highly improved.

This "inverted temperature gradient" 7.2, up to now totally unusual in the rolling technology - that is based commonly on a constant distribution of the temperature throughout the thickness of the slab with a maximum variation of 30°C, in this case the inner core being colder than the surface - leads to positive characteristics in the finished product and can be taken into consideration as third technical advantage V3 of the process (22.3 with reference to the control system of figure 2).

On the contrary, with a higher distance 6.1 between the continuous casting machine 1 and the entry into HRM 5, such as up to 350 m to allow the



introduction of a compensation furnace (preferably a continuous roller furnace) to compensate the temperature of the material to be rolled or slab 5.2, the so-called third advantage V3 corresponding to the temperature inverted gradient 7.2 as above defined is lost.

5. After passing through the roughing mill HRM 5, the intermediate strip 5.3 with a thickness 30-8 mm, according to the best conditions for the process in the all, directly enters an induction heating path 8. The distance between the exit from HRM 5 and the entry into the induction heating 8 should be designed as short as possible to reduced the temperature losses, so as the temperature of the  
10 intermediate strip 9 will not become lower than AC3, i.e. about 900° C, thus leaving the austenitic area of crystallization.

- The distance between the exit of HRM and the entry of the induction heating 8 should be equipped with a device of transverse separation, preferably a shearing device 10, and for reasons of safety in order to obviate breakdowns in the  
15 rolling mill, with a transverse transportation device 11. The plate-shaped sheets, being cut in case of breakdown, already show sufficient properties of the material and therefore can be sold. In order that the temperatures losses of the intermediate strip 5.3 are as small as possible in the zone of the transverse transportation line, there should be provided a tiltable cover 12 for its insulation or even a tiltable  
20 cover with possibility of induction heating 12.1 between the shears 10 and the entry of the induction heating path 8.

- When passing throughout the induction heating pass 8 the intermediate strip 5.3 is fed with a thickness between 30 and 8 mm according to the desired hot rolled strip 13 in view of the programmed thermo-mechanical rolling 14 as seen in  
25 the T.T.T. diagram 14.1, when bearing in mind the thickness of the hot rolled strip and the type of structure at the temperature between 1100°C and 1400°C. Such a flexibility in managing the temperature can be reached only through an induction heating, whereas a furnace fed by primary energy is slow and its temperature cannot change from a hot strip to another.

- 30 Advantageously, according to the inventions, a regulation algorithm is provided for the overheating of the pre-strip 5.3 (head and tail), and in particular

the temperature control which involves the induction furnace 8.

Practical tests have in fact shown that a controlled overheating of both the head and tail of the intermediate strip is of great help in finishing mill rolling for preventing cobbles and obtaining the best product tolerances, especially in the manufacture of ultrathin products ( $< 1$  mm).

Such a flexibility in managing the temperature of the intermediate strip by means of the induction furnace 8, in order to ensure an optimized thermo-mechanical rolling in the meaning of the diagram T.T.T., can be identified as a fourth technical advantage V4 of the process (corresponding to parameter 22.4 in the control system according to figure 2).

The process according to the invention, with the relevant production line, allows to choose either a "continuous rolling" 15 or even a standard rolling to coils 16 with specific weights of the coil, e.g. of 20 kg/mm of strip width. In case of "continuous rolling" 15 the intermediate strip 5.3 enters the finishing rolling mill 18 at the desired temperature, as it has been fixed in the induction furnace 8 between 1100°C and 1400°C (8.1) and at an entry speed which is bound to the casting speed 2.3 and is the same as the speed at the exit from HRM throughout a plastic stretching device 17 and a descaling device 17a.

Plastic stretching device 17 causes lengthening, referred to a section of initial length  $L_0$ , equal to:

$$E = (L_1 - L_0) / L_0$$

Associated with the stretch, which gives rise to this lengthening, is a plastic bending due to the passage through the rolls 17.1, which leads to the breaking of the adherent scale a - b and the rolled-in scale, much less ductile and more fragile than the steel, above all in the temperature range between 600 and 1300°C. Broken in this way, as shown in figure 1b with a' and b', the scale is completely removed in a subsequent descaling step 17a downstream of the device 17, so the pre-strip 5.3 presents itself at the entry to the finishing mill 18 with a surface free of any type of scale. It is therefore possible, after the finishing mill 18, to obtain a product free of surface defects.

It is to be noted that the above-mentioned plastic bending is achieved

preferably by also providing a relative penetration movement between the upper and lower rolls 17.1, such as to produce bending in plastic conditions which ensures a stretching of the material of more than 2%. For this purpose a control system for the position of the rolls 17.1 and the force impressed by the device 17 can be provided. This control system preferably includes means able to keep stretching of the material within acceptable values ( $< 0.7\%$ ) of length variation, by using a mass flow variation measuring device, obtained by means of two encoders connected to the entry and exit of the device 17.

The continuous rolling 15 requires a carousel coiler 19 with pre-heating 19.1 and shears 19.2, preferably flying shears immediately after the exit from the finishing mill 18 at a distance of about 20-30 m near the standard downcoiler station 20 with a laminar cooling provided upstream on a runout table 20.1 about 60 m long. The continuous rolling also allows, with a corresponding adaptation of the plant, for a direct connection with the subsequent working step 20.2 such as pickling, cold rolling or galvanizing system.

The above-mentioned "continuous rolling", the direct connection of the continuous casting machine 1 and roughing mill 5 with a finishing mill 18, assisted by the induction heating 8, can be cited as a fifth technical advantage V5 of the process (parameter 22.5 in the control system 22 of figure 2).

The process of the invention with its corresponding production line also provides for manufacturing common coils of hot rolled strip 16 of 20 kg/mm width. When producing coils of hot rolled strip 16 with standard weights of the coil the process, with its production line, allows to vary by hot rolling:

- the entry speed 18.2 between 3.3 and 0.6 m/s; and
  - the temperature of the intermediate strip 8.1 between 1000°C and 1400°C
- with the aim of making it possible to manufacture hot rolled strip with different thicknesses and steel qualities from one coil to another, each time under the best conditions, with the aid of thermo-mechanical rolling.

A so high flexibility of the process parameters as to the entry speed of the intermediate strip 18.2 into the finishing mill as well as its temperature 8.1, being conditioned by the induction heating 8, enables a thermo-mechanical rolling 14 in

the meaning of the T.T.T. diagram and consequently the production of different qualities of steel and different thicknesses of hot rolled strip from one coil to another. This can be considered as the sixth technical advantage V6 of the process (parameter 22.6 of the control system 22 of figure 2).

5       The above-mentioned six advantages of the technical process with their high flexibility are used as best as possible for the rolling in the finishing mill 18, which consists of six stands at maximum in order to accomplish with an exit temperature 21 > AC1 of about 750°C the management of the controlled thermo-mechanical temperature 14 of the hot rolled strip 13 according to the T.T.T.  
10       diagram 14.1, with the thickness of the hot rolled strip 13.1 being prefixed between a minimum of 0.4 mm and a maximum of 12 mm.

At prefixed values of steel quality and thickness of the hot rolled strip, leading to a specific T.T.T. diagram, during the rolling programming step the following is determined:

- 15       - the cooling strategy;  
          - the programming of passes; in connection with  
          - the management of the strip temperature in the finishing mill

while including all the six technical areas influencing the process, as described above.

20       Such a seventh technical advantage of the process V7 (parameter 22.7 in the control system 22 of figure 2) with its process parameters will be considered as the main or "master" datum for the best accomplishment of the whole process starting from the continuous casting system 1 until the possible winding stations 19 or 20 in case of continuous rolling or of production of standard hot rolled strip,  
25       and dictates the process parameters of the six technical areas of the process as above described, which can also be defined as control systems 22 of the process.

In figure 2 the process control system 22 is represented with its master system 22.7 in the finishing mill area with cooling and downcoiler included, as well as the relevant subsystems from 22.1 to 22.6 for carrying out the whole  
30       process by the corresponding apparatus. Such a process control system 22 achieves its own data for the qualities of steel to be produced e.g. a Dual Phase or

- 11 -

TRIP or TWIP steel with specific features of material 23 and the T.T.T. diagram 14.1 relating thereto for the thermo-mechanical rolling 14. In the finishing mill area, including the cooling according to the T.T.T. diagram, the master system 22.7 determines the process data to achieve the advantageous objects desired as far as the best quality of the strip and production safety are concerned, as well as concerning the reduced production costs.

Figures 3 and 4 are obtained on the basis of the following table, that shows a program of passes for the finishing mill 18, with five stands for producing a hot rolled strip being 0.7 mm thick under the conditions of a continuous rolling 15, as well as the corresponding temperature variations of the intermediate strip 5.3 from its leaving the induction heating path 8 to the hot rolled strip with a thickness of 0.7 mm at its exit from the fifth stand of the finishing mill 18 with heat supply equal to zero in the five transformation passes.

Position		JH	F1	F2	F3	F4	F5	SCC	DC
Distance	m	10	5	5	5	5	20	60	
Strip thickness	mm	10	5	3	1.5	0.9	0.7		
Speed	m/s	0.6	1.2	2.0	4.0	6.7	8.6		
Time (1:3)	S	17	4.2	2.5	1.25	0.75	2.3	6.9	
<<Time		17	21.2	23.7	24.95	25.70	28.0	34.9	
Temperature	°C	1100 *1	982	935	895	855	825		
Cooling speed	°C/S	4	11	16	32	40	50		
	°C	1200 *1	1048	995	945	901	864		
	°C/S	6	13	20	35	50	56		
	°C	1300 *1	1114	1047	991	941	894		
	°C/S	8	16	22	40	60	68		
	°C	1400 *1	1180	1086	1023	960	913		
	°C/S	10	22	25	50	65	71		
Reduction at each pass	mm		10/5	5/3	3/1.5	1.5/0.9	0.9/0.7		
	%		50	40	50	40	22		

## Basic conditions:

- Casting speed 7.2 m/min
- Slab thickness 50 mm
- HRM 50/10 mm
- 5 - Continuous rolling

\*1) Incl. 50°C due to descaling

JH - Induction furnace

SCC - Carousel furnace

DC - Standard coiler

10 Figure 3 shows the variation of the strip temperature in function of the programmed sequence of passes, or of the strip thickness in mm for different temperatures of the intermediate strip at the exit of the induction heating 8. The diagram clearly shows that when the temperature increases between 1100°C and 1400°C the temperature of the strip going out from the fifth stand increases from 15 825°C by 88°C up to 913°C, whereby it is again above AC3 at about 900°C, i.e. in the austenitic zone. By increasing the strip temperature in the induction furnace a higher safety is achieved for the thermo-mechanical treatment according to the T.T.T. diagram.

Figure 4 shows the strip temperatures in function of the subsequent passes 20 in the time, expressed in seconds, against different temperatures of the intermediate strip when leaving the induction heating path 8. The diagram leads to the same indications as diagram of figure 3, but makes still clearer that with a strip thickness reduction the cooling increases more than proportionally according to the Boltzmann radiation law and the conditions for a strip of only 0.4 mm become 25 correspondingly more critical. The purpose is that of maintaining a temperature in the field of values 24 between AC3 and AC1 of 900-750°C, such as for a carbon steel with the composition:

- 0.15% C
- 1.50% Mn
- 30 - 1.50% Si
- 0.50% Cu

and a temperature in the martensitic zone of about 430°C. To this purpose and mainly not to go down below the lower limit AC1, it is possible to intervene by increasing the casting speed 2.3 in case of continuous rolling and increasing the entry speed 18.2 into the finishing mill in case of standard production of coils.

5        Figure 5 shows a T.T.T. diagram for analyzing a steel by which a Dual Phase steel, either TRIP or TWIP, can be produced by means of a different management of the temperature of the hot rolled strip between the last stand of the finishing mill 18 and the carousel coiler 19 or a standard downcoiler station 20. In case of Dual Phase steel in consequence of the high cooling speed and the  
10        enrichment of C in the separation ferrite a temperature of about 250-200°C is reached with consequent separation of martensite. In case of TRIP steel with the same steel analysis, in consequence of the lower cooling speed, there results a formation of ferrite, bainite and residual austenite.

      The T.T.T. diagram also allows to recognize that on the cooling lines  
15        between the last stand of the finishing mill 18 and the carousel coiler 19 or the standard downcoiler station 20 in addition to the respective cooling line there should be placed an isolation line and/or an induction heating line 20.3.

      From the above it clearly results that the main advantage of the present invention is that of allowing ultrathin hot rolled strip being manufactured with a  
20        thickness of down to a minimum of 0.4 mm in high quality steels for the car industry, both of the carbon type and in the field of stainless steels by using the thin slab technique. The process of the invention as described above with its specific production line renders it possible a great flexibility, unknown up to now, of the whole process with its individual operation steps and the corresponding  
25        units and apparatuses of the production line, in particular the continuous casting machine 1, the roughing mill HRM 5, the induction heating path 8, the intermediate winding station 16.1 and finishing mill 18 with the cooling line and the coiling reel station, thus allowing e.g. the successful and economic production of Dual Phase, TRIP and TWIP steels. By taking into account the specific T.T.T.  
30        diagram for different steel qualities and by means of a process control system 22, cooperating with the control master system 22.7 and six additional control

- 14 -

subsystems from 22.1 to 22.6, the thermo-mechanical rolling process 14 can be programmed, guided and controlled in the best possible way within the range of the process parameters starting from the continuous casting system 1 until the hot rolled strip coiler 19 or 20, otherwise until the passage to the subsequent working  
5 steps 20.2 for a continuous rolling 15 or a standard rolling of hot coils.



- 16 -

- said plastic stretching (17) combined with descaling (17a) to eliminate scale from the surface of the intermediate strip;
- said final transformation (18) being a rolling step down to a thickness of the finished strip of 0.4 mm as a minimum with not more than six passes and a controlled temperature of the hot rolled strip at the exit therefrom  $> 750^{\circ}\text{C}$  (AC1); and
- a controlled cooling (14) of the strip (13) in the time between the end of the final rolling (18) and the coiling until a minimum temperature of  $200^{\circ}\text{C}$  according to the corresponding T.T.T. diagram (14.1) specific for the steel quality of the strip thickness.

2. Process according to claim 1, characterized in that said roughing step (5) occurs directly after the slab solidification with a relatively hot core (7) of the slab at a temperature of less than  $1450^{\circ}\text{C}$ , near the temperature of steel solidification (7.1) higher than  $1100^{\circ}\text{C}$ , thereby with an inverted temperature gradient (7.2) throughout half thickness of the slab.

3. Process according to claim 2, characterized in that immediately after the roughing step (5) the intermediate strip (5.3) can be separated crosswise, preferably cut (10).

4. Process according to claim 3, characterized in that directly after the possible separation (10) of the intermediate strip a withdrawal (11) of plate-shaped sheets is possible by means of a cross-wise transportation.

5. Process according to any of the preceding claims, characterized in that the intermediate strip (5.3) can be directly guided to the final rolling immediately after the temperature regulation by induction heating (8) in case of continuous rolling (15) or is subject to an intermediate winding (16.1) before the final rolling.

6. Process according to any previous claim, characterized in that the intermediate strip (5.3) can be rolled in a controlled way through six passes at a maximum to a finished hot rolled strip with a minimum thickness of 0.4 mm and a temperature at the exit from the last pass of final rolling (18) in a range (24) between a minimum of  $750^{\circ}\text{C}$  (AC1) and preferably a maximum of  $900^{\circ}\text{C}$  (AC3).

7. Process according to claim 5, characterized in that the intermediate

## CLAIMS

1. Process for the continuous production of ultrathin hot rolled strip from thin slab obtained by continuous casting, comprising the following process steps:
- 5 steps:
- a continuous casting step (1);
  - a pre-transformation (5) subsequent to continuous casting step (1);
  - an induction heating (8); and
  - a final transformation (18) with previous plastic stretching (17), descaling
- 10 (17a) and subsequent cooling and coiling,
- characterized by:
- the slab leaving the mould with a central crown of a value preferably between 0,5 and 5,0 mm at each side;
  - a reduction of the slab thickness in continuous casting during the solidification
- 15 (3.1) by 60% at maximum, from 100 to 70 mm, until a reduction from 80 to 40 mm;
- a secondary cooling during the liquid steel core reduction step (3B), performed only by spray nozzles (3a), with the following characteristics:
    - specific water delivery between 0.6 and 3.0 liters per kg of cast steel,
  - decreasing cooling density in the direction of the slab advancement due to
- 20 liquid core reduction,
- selective control of cooling fluid flow rates between the front side and the back side of the slab;
  - said pre-transformation being a roughing (5) step of the thin slab upon
- 25 solidification at a surface temperature of the slab  $> 1100^{\circ}\text{C}$  with not more than four passes to obtain an intermediate strip (5.3) having different thicknesses chosen in the range from 30 to 8 mm with a central crown of up to 0.4 mm at each side;
- said induction heating (8) being adapted to fix various temperatures of the
- 30 intermediate strip chosen between  $1000$  and  $1400^{\circ}\text{C}$  and overheating function of the head and tail;

strip (5.3) can enter the finishing mill (18) at different speeds between 0.2 and 5.0 m/s.

8. Process according to any previous claims, characterized in that between the last rolling pass and the coiling step the finished hot rolled strip (13) can be brought in a thermally controlled way and in the time to a final temperature higher than 200°C and thermo-mechanically (14) according to the T.T.T. diagram (14.1).

9. Process according to claim 8, characterized in that the thermally controlled management (14) in the time of the hot finished strip (13) with a determined thickness and chemical composition (steel analysis) by means of a cooling strategy thanks to a cooling line (19.1), (20.1), as well as to an isolation or heating line (20.3) based on the corresponding T.T.T. diagram (14.1) the desired structures and properties of the material are obtained and consequently the desired steel quality (23) between the last rolling pass and the coiling step.

10. Process according to claim 9, characterized in that the finished hot rolled strip (13) is wound with the desired properties of the material.

11. Process according to claim 9, characterized in that the finished strip (13) with the desired material properties can be directly brought to subsequent working steps (20.2) without preliminary winding.

12. Process according to any one of the preceding claims, characterized by comprising a process control system (22) provided with specific parameters for the steel type according to the T.T.T. diagram (14.1) for a treatment rolling (14) of thermo-mechanical nature, consisting in a main master system (22.7) and six process subsystems (from 22.1 to 22.6) for programming, performing and controlling the whole process.

13. Production line for carrying out the process, comprising a machine 1, for the continuous casting of thin slab with a mould with of 2.2 m at maximum and a thickness at the mould exit of 100-70 mm with production lines connected thereto, such as:

- a roughing mill (5) with not more than four rolling stands;
- an induction heating path (8);

- 18 -

- a finishing mill (18) with not more than six rolling stands;
- at least one coiling station (20); and
- a cooling line between the finishing mill (18) and the coiling station (20),
- characterized by the fact that said continuous casting machine (1) is able to
- 5 give a crowned shape of the cross section of the slabs and further comprising in particular:
- a roller table (3) for reducing the slab (3.1) thickness during the solidification from 100 to 70 mm at the mould exit up to a solidification thickness (3.2) of 80-40 mm within the said roller table itself at the casting speed as high as
- 10 possible (2.3) of 10m/min;
- a secondary spray cooling system (3B) by means of spray nozzles in correspondence with the said casting machine (1);
- said roughing mill (5) being equipped with rolls suitable to obtain a crown of up to 0,4 mm at each side;
- 15 - said induction heating path (8) having a length of 40 m at maximum, immediately downstream of the roughing mill (5) with temperatures of intermediate strip (8.1) at the furnace exit of 1100-1400°C and suitable to manage the overheating of the head and tail of the intermediate strip by means specific algorithm; and
- 20 - a plastic stretching device (17) combined with a descaling device (17a), placed before said finishing mill (18), composed of a battery of upper and lower rolls in a total number of at least three.

14. Production line according to claim 13, characterized in that said roughing mill (5) is placed directly at the end of the continuous casting machine

25 (1) at a distance of 10 m therefrom.

15. Production line according to claim 13 or 14, characterized in that immediately after the roughing mill (5) there is provided a device for transverse cutting (10), preferably a shearing device.

16. Production line according to claim 15, characterized in that

30 immediately after the transverse cutting device or shears (10) there is provided a cross-wise transportation device for the removal of plates from the intermediate

strip.

17. Production line according to claim 13, characterized in that between the induction heating path (8) and the plastic stretching device (17) there is provided an intermediate winding station (16.1) immediately upstream of the finishing mill (18).

18. Production line according to claim 13, characterized in that the distance between the stands of the finishing mill (18) is of 6 m at maximum.

19. Production line according to claim 13, characterized in that immediately after the last stand of the finishing mill (18) there is provided a coiling station (19), preferably a carousel coiler, being preceded by an intensive cooling line (19.1).

20. Production line according to claim 19, characterized by comprising an additional conventional cooling line for hot rolled strip (20.1) with at least one downcoiler station (20) at the end of the whole production line.

21. Production line according to claims 19 and 20, characterized in that the cooling lines (19.1; 20.1) can be also equipped with an isolating line and/or an induction heating furnace (20.3).

22. Production line according to claim 13, characterized in that the hot rolled strip, being rolled and cooled in a thermally controlled manner and in the time (14) is directly brought to the subsequent working line without preliminary coiling.

23. Production line according to any of claims 13-22, characterized by comprising a process control system (22) consisting in a "master" main system (22.7) and additional six peripheral subsystems (22.1-22.6) for programming, guiding and controlling the whole production.

24. Production line according to claim 23, characterized in that the process control system (22) receives from the outside, such as the programming central computer system, specific parameters relating to the steel quality for thermo-mechanical rolling (14) according to the T.T.T. diagram (14.1) with the exit temperature from the last stand of the finishing mill (18) in the range AC3/AC1 (24) between 900 and 750°C.

**THIS PAGE BLANK (USPTO)**




DT04 Rec'd PCT/PTO 15 JUL 2004

**THIS PAGE BLANK** (USPTO)






10/501663

Fig. 1b

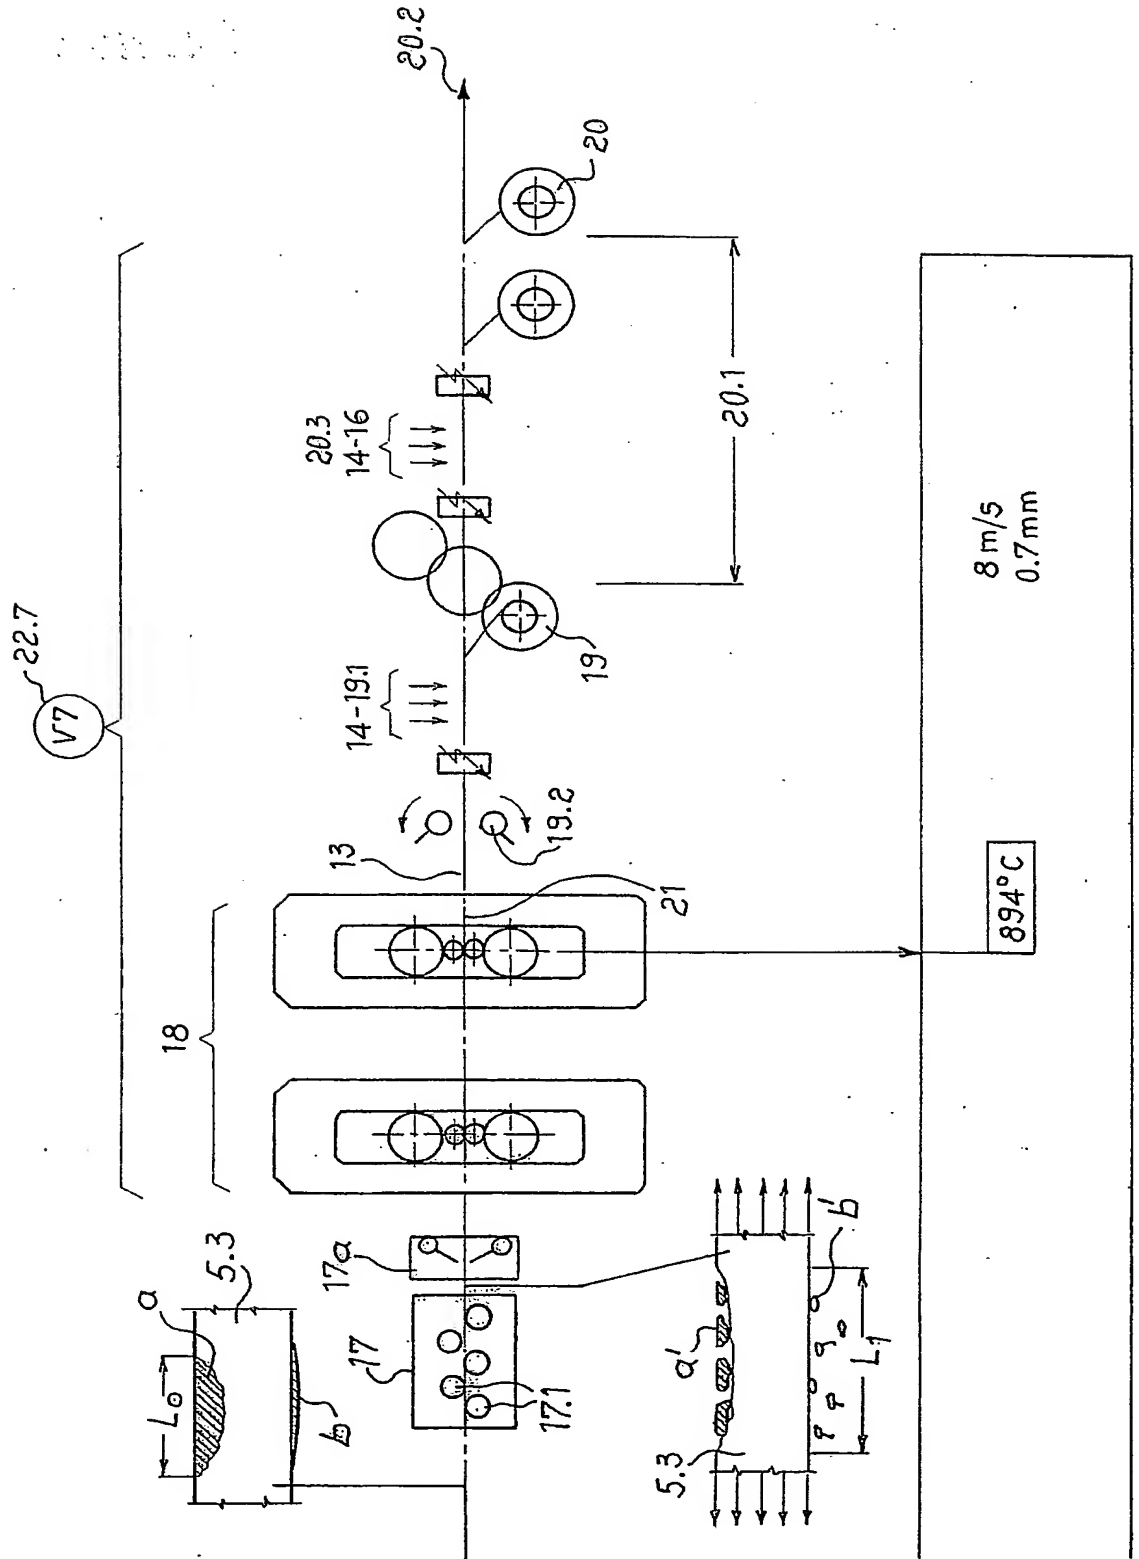

DT04 Rec'd PCT/PTO 15 JUL 2004


**THIS PAGE BLANK (USPTO)**

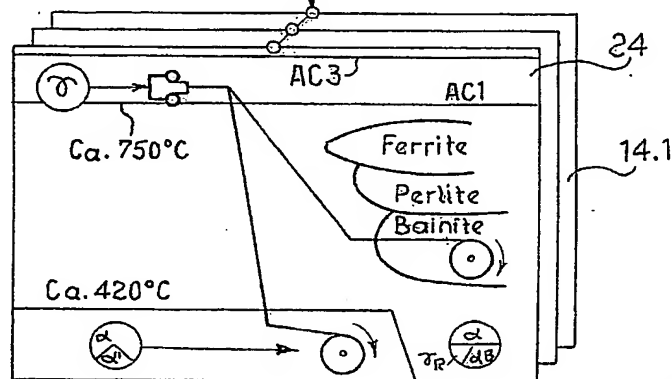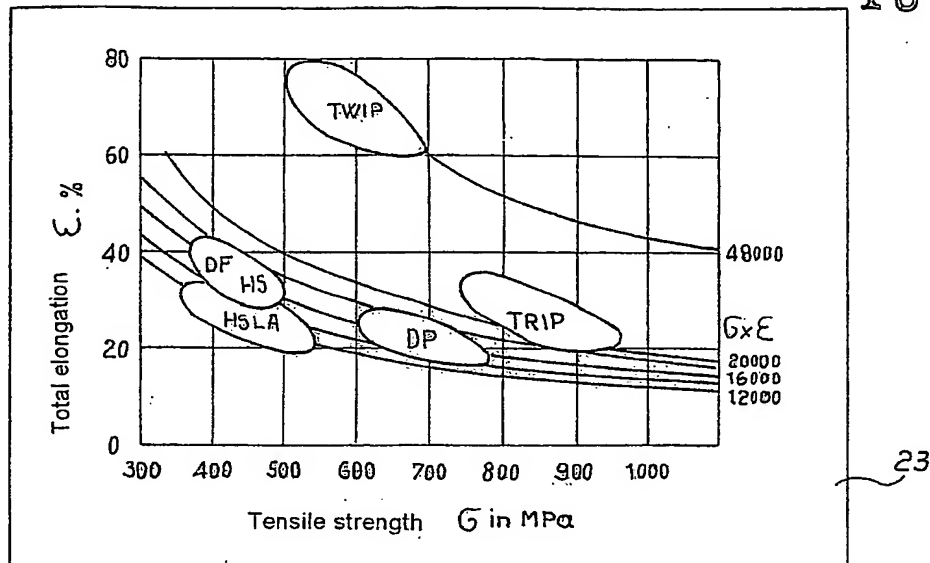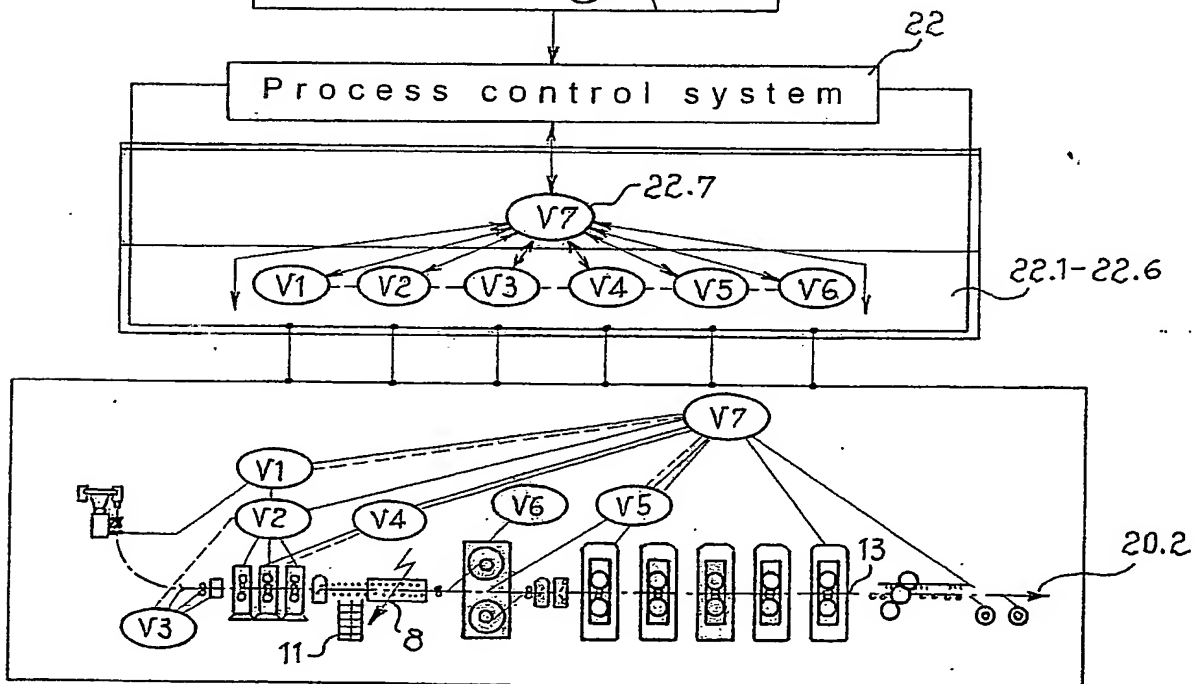*Fig. 2*

DT04 Rec'd PCT/PTO 15 JUL 2004

**THIS PAGE BLANK (USPTO)**


10/501663

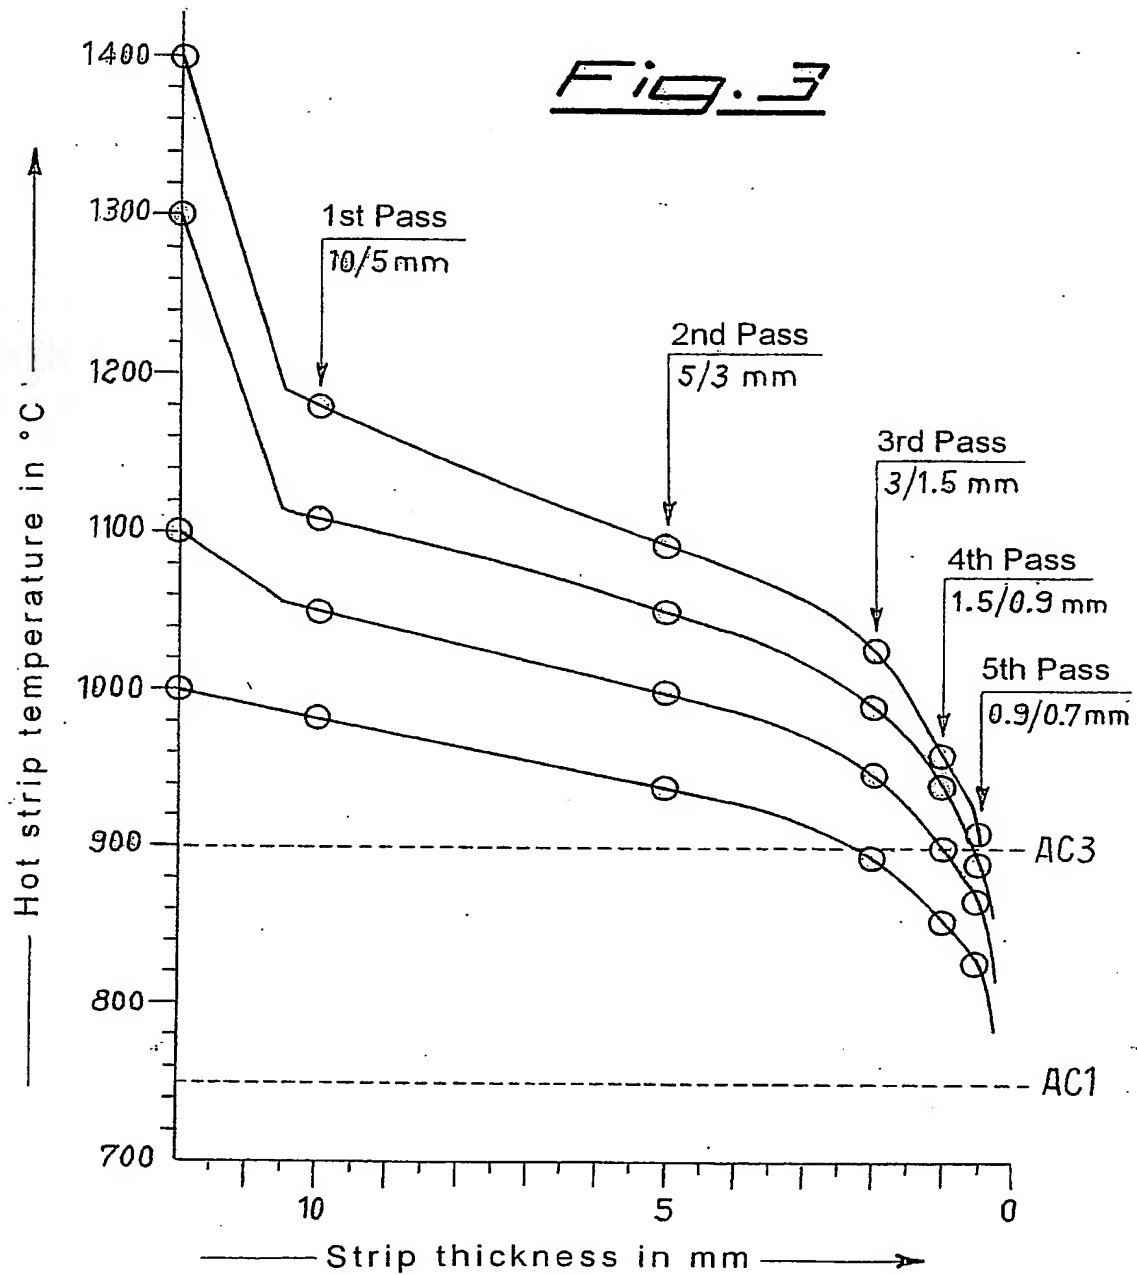

DT04 Rec'd PCT/PTO 15 JUL 2004

**THIS PAGE BLANK (USPTO)**

10/501663

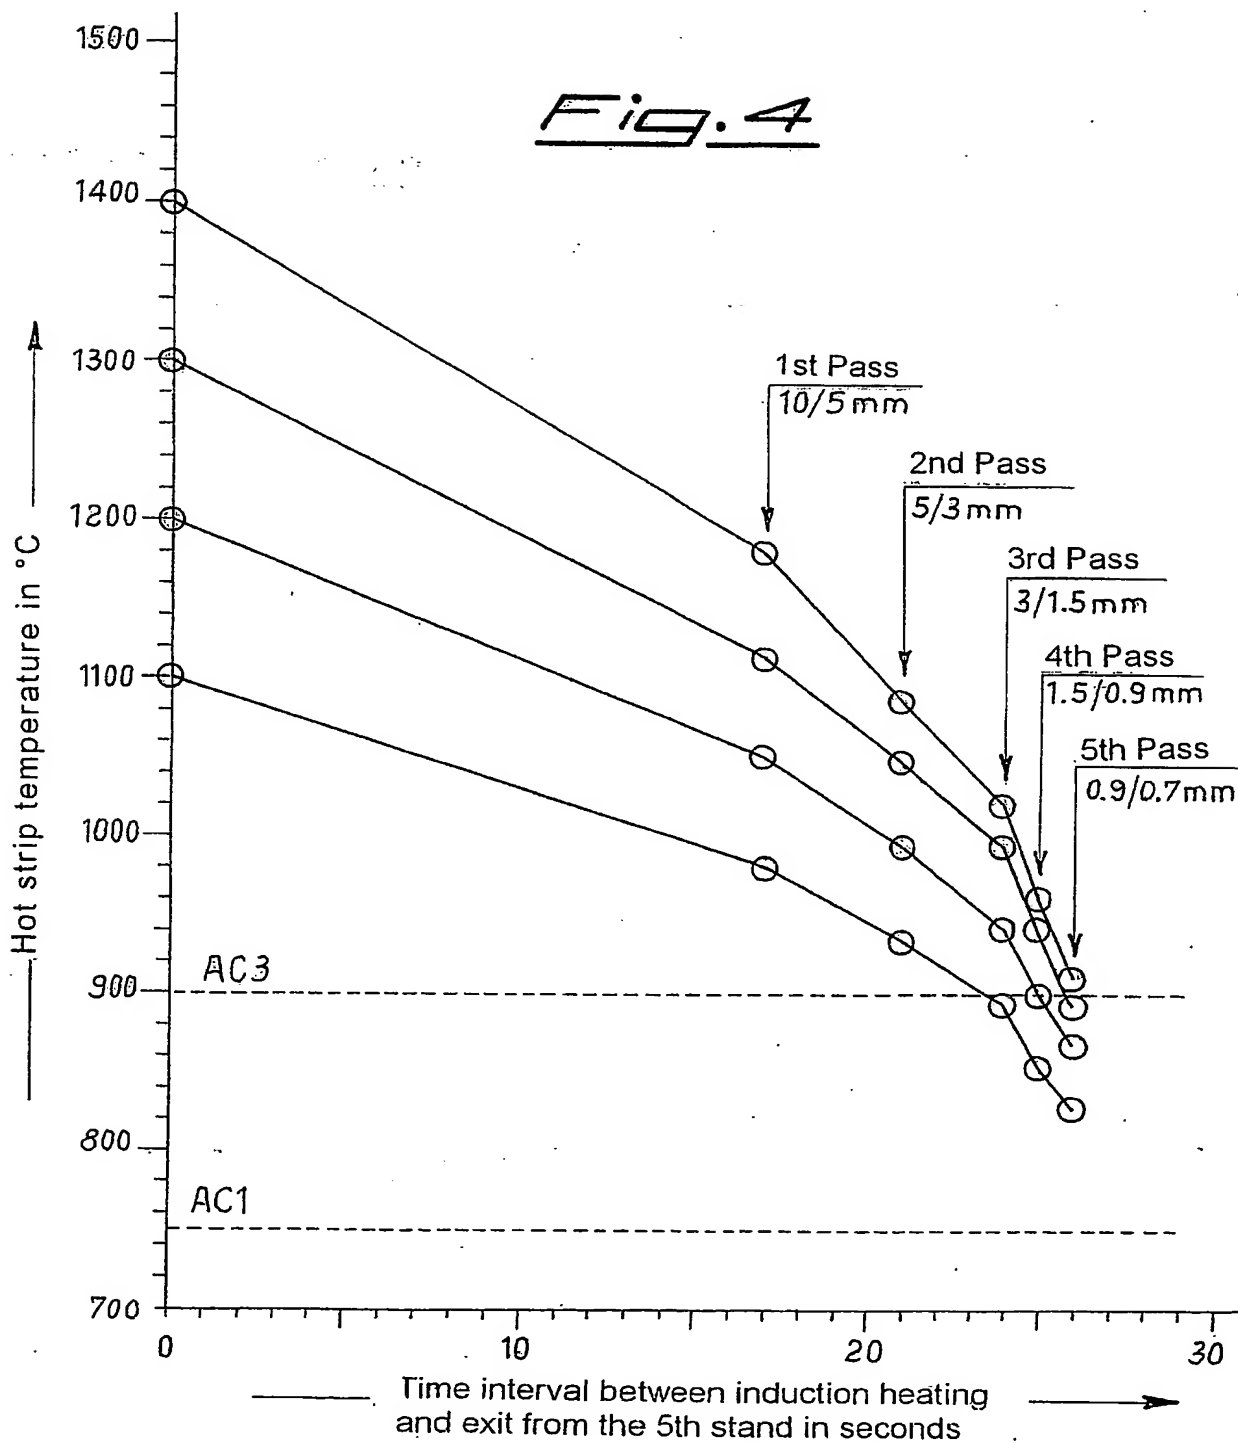


DT04 Rec'd PCT/PTO 1 5 JUL 2004

**THIS PAGE BLANK (USPTO)**



10/501663

Fig. 5

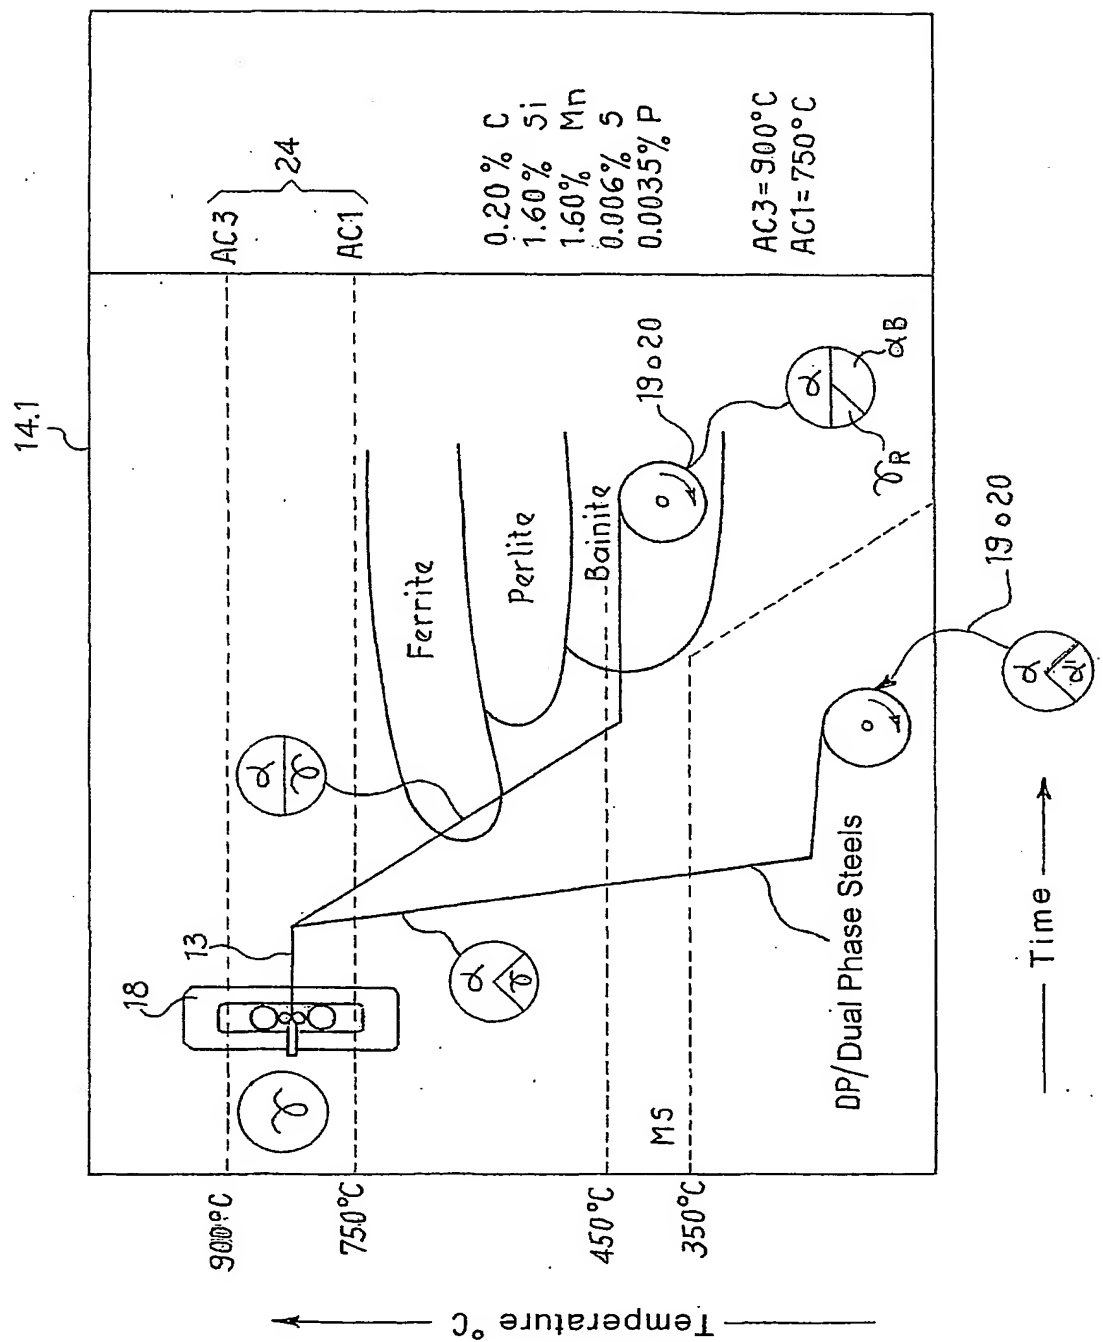

DT04 Rec'd PCT/PTO 1 5 JUL 2004

**THIS PAGE BLANK (USPTO)**

# INTERNATIONAL SEARCH REPORT

Internat cation No  
PCT/IT 03/00523

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 B21B1/46 B22D11/06 B21B1/26 B21B37/00 B21B37/34

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 B21B B22D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 634 257 A (YOSHIMURA YASUTSUGU ET AL) 3 June 1997 (1997-06-03) column 10, line 48 -column 14, line 55; figure 1	1,13
A	US 6 276 436 B1 (PLESCHIUTSCHNIGG FRITZ-PETER) 21 August 2001 (2001-08-21) column 4, line 13 - line 16; figure 1	1,13
A	WO 00 20141 A (ARVEDI GIOVANNI) 13 April 2000 (2000-04-13) cited in the application page 5, line 35 -page 6, line 28	1,16,17, 22
A	WO 99 29446 A (BODIN ANDRE ;HOOGOVS STAAL BV (NL)) 17 June 1999 (1999-06-17) page 8, line 7 - line 17; figure 1	19
	--- -/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

### \* Special categories of cited documents :

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \* & \* document member of the same patent family

Date of the actual completion of the international search

4 December 2003

Date of mailing of the international search report

16/12/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax (+31-70) 340-3016

Authorized officer

Petrucchi, L

# INTERNATIONAL SEARCH REPORT

Internati      lication No  
PCT/IT 03/00523

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	GB 2 327 375 A (KVAERNER METALS CONT CASTING) 27 January 1999 (1999-01-27) page 7, line 7 - line 25; figure 3	23, 24
A	WO 00 59650 A (ARVEDI GIOVANNI) 12 October 2000 (2000-10-12) the whole document	

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No  
PCT/IT 03/00523

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5634257	A	03-06-1997	JP 3174457 B2 JP 7308701 A BR 9502048 A CN 1116136 A ,B DE 19518144 A1	11-06-2001 28-11-1995 19-12-1995 07-02-1996 23-11-1995
US 6276436	B1	21-08-2001	AU 753199 B2 BR 9707100 A CN 1222419 A DE 19639297 A1 JP 11179505 A AT 202735 T AU 5108098 A DE 59703945 D1 EP 0834364 A2 US 2002017375 A1 ES 2160877 T3	10-10-2002 27-07-1999 14-07-1999 26-03-1998 06-07-1999 15-07-2001 29-07-1999 09-08-2001 08-04-1998 14-02-2002 16-11-2001
WO 0020141	A	13-04-2000	IT 1302582 B1 AT 220578 T AU 2544699 A BR 9914168 A CA 2343945 A1 CN 1321112 T DE 69902185 D1 DE 69902185 T2 EP 1117493 A1 ES 2180276 T3 WO 0020141 A1 PL 347167 A1 TR 200100884 T2 US 2001011565 A1	29-09-2000 15-08-2002 26-04-2000 19-06-2001 13-04-2000 07-11-2001 22-08-2002 30-01-2003 25-07-2001 01-02-2003 13-04-2000 25-03-2002 21-02-2002 09-08-2001
WO 9929446	A	17-06-1999	NL 1007731 C2 AT 253993 T AU 757456 B2 AU 1512799 A BR 9813441 A CA 2313535 A1 CN 1281394 T EP 1037721 A1 JP 2001525255 T WO 9929446 A1 PL 340998 A1 SK 8492000 A3 TR 200001625 T2 TW 430575 B US 6616778 B1 ZA 9811209 A	09-06-1999 15-11-2003 20-02-2003 28-06-1999 10-10-2000 17-06-1999 24-01-2001 27-09-2000 11-12-2001 17-06-1999 12-03-2001 07-11-2000 21-12-2000 21-04-2001 09-09-2003 09-06-1999
GB 2327375	A	27-01-1999	AU 8450498 A WO 9904915 A1	16-02-1999 04-02-1999
WO 0059650	A	12-10-2000	WO 0059650 A1 AT 244078 T AU 3532199 A DE 69909332 D1 EP 1196256 A1	12-10-2000 15-07-2003 23-10-2000 07-08-2003 17-04-2002

**THIS PAGE BLANK (USPTO)**